



Perimeter Detection Systems

# G-FENCE 600 & G-FENCE 600Z

Fence Detection Systems



## Zoning Option

- 10 detection zones
- Control of video systems

## Integrated web server

- Remote maintenance
- Setting : number of impacts and sensibility
- Event log history: alarm sensor location
- Real time visualization of the site: fault diagnosis



## Easy Installation

- 600m (1968 ft) perimeter maximum
- Auto calibration of the sensors
- Simple and quick installation with tie-wraps
- Passive cable, only the sensors detect




G-FENCE 600 Z Control Unit board

## Zoning Option



Available on **G-FENCE 600 Z**

- Up to 10 detection zones
- Dry contact board integrated inside the control unit
- Control of video systems

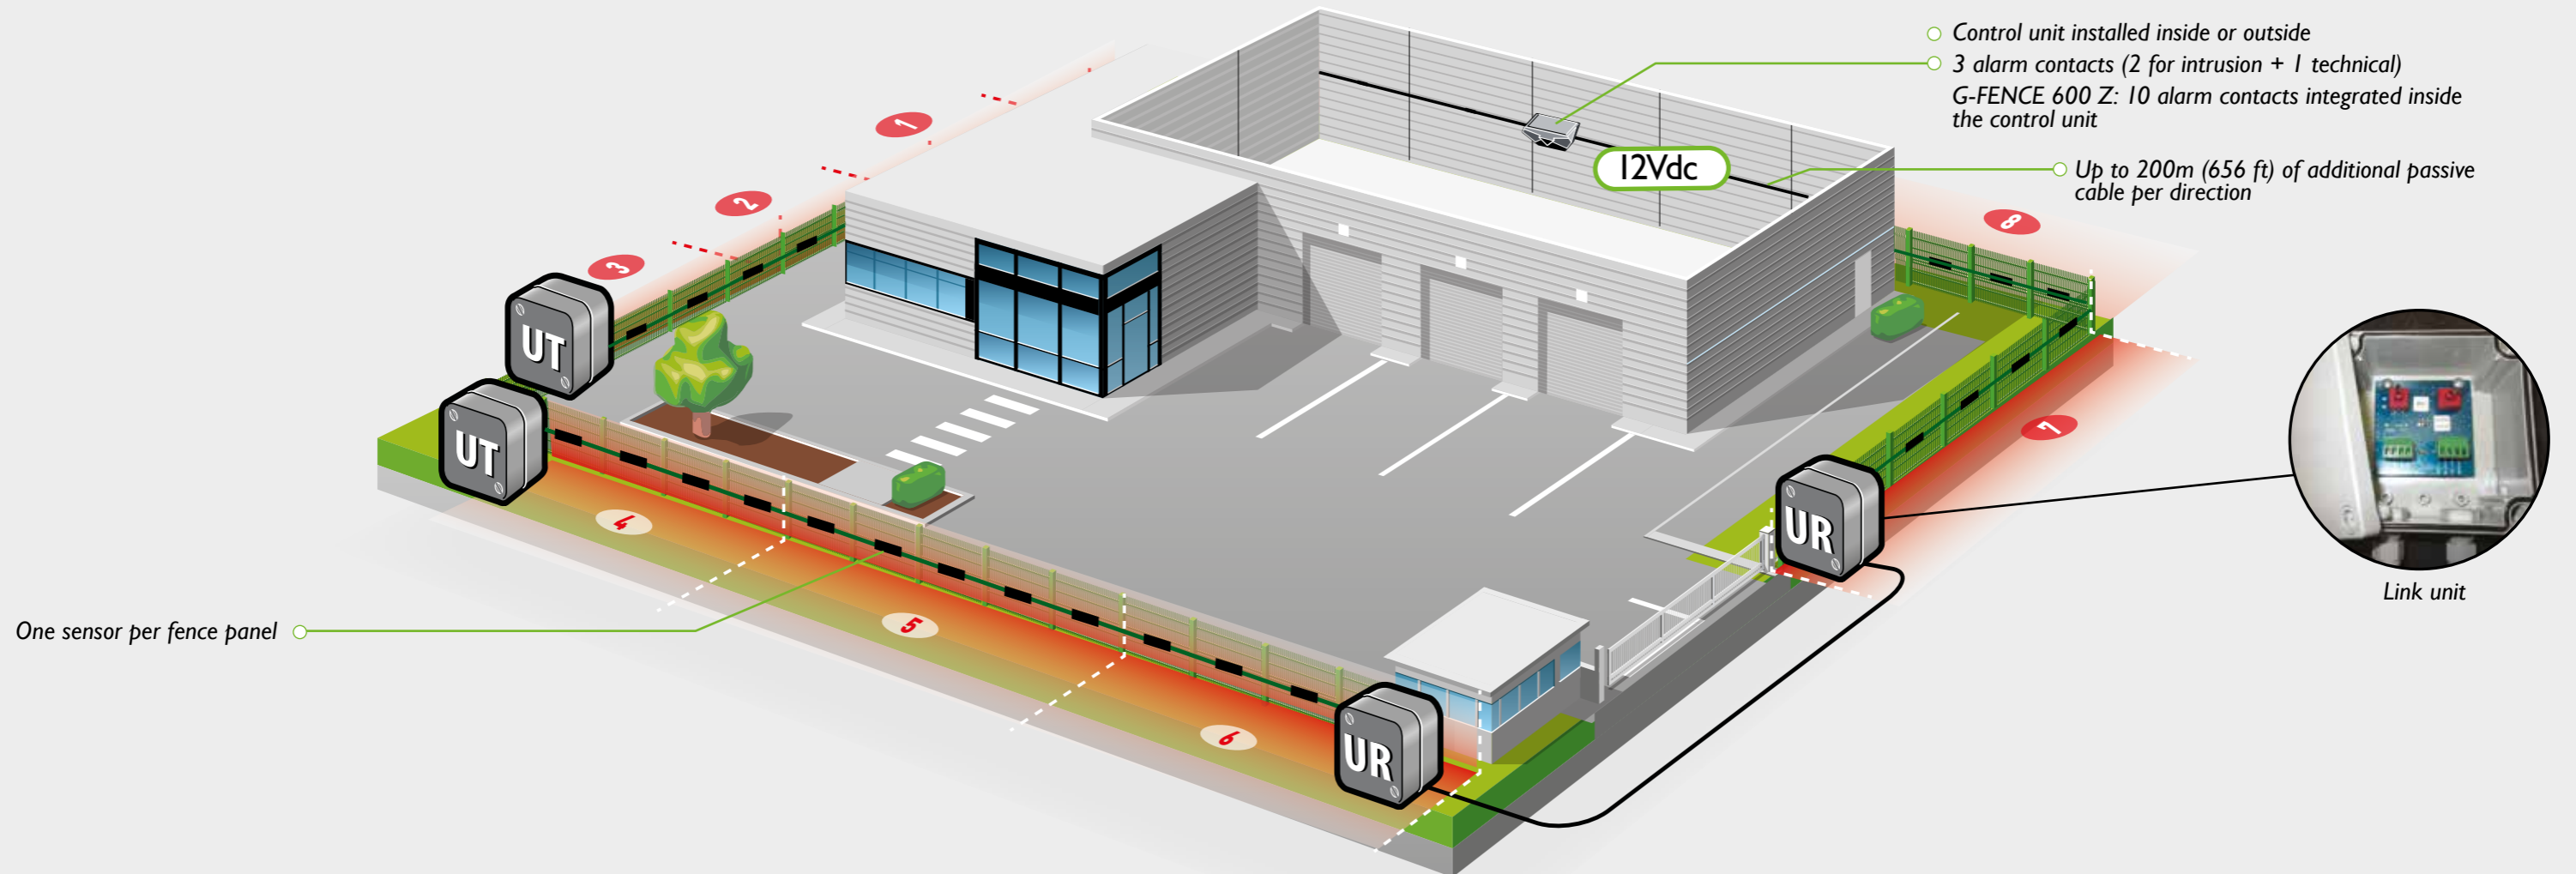

## Simple offer

- Only 4 references:
  - Cable
  - Control unit
  - Control unit with zoning option
  - Termination / Link unit




## Integrated web server

- Detection adjustment and maintenance at distance
- Event log history
- Intrusion localisation



## Technical Characteristics

<b>Power supply</b>	12Vdc
<b>Alarm outputs</b>	2 intrusion alarms (1 per zone) + 1 technical alarm
<b>Operating temperature</b>	From -35°C up to +70°C (from -31°F up to 158°F)
<b>Electromagnetic compatibility</b>	Compliance with European standards (label CE)
<b>Installation</b>	1 sensor per fence panel - up to 200m (656 ft) of additional passive cable per cable start
<b>Configuration</b>	Auto-calibration - Sensitivity adjustment per sensor/zone at distance or locally without software
<b>Remote maintenance</b>	Integrated web server - Up to 1000 event log history

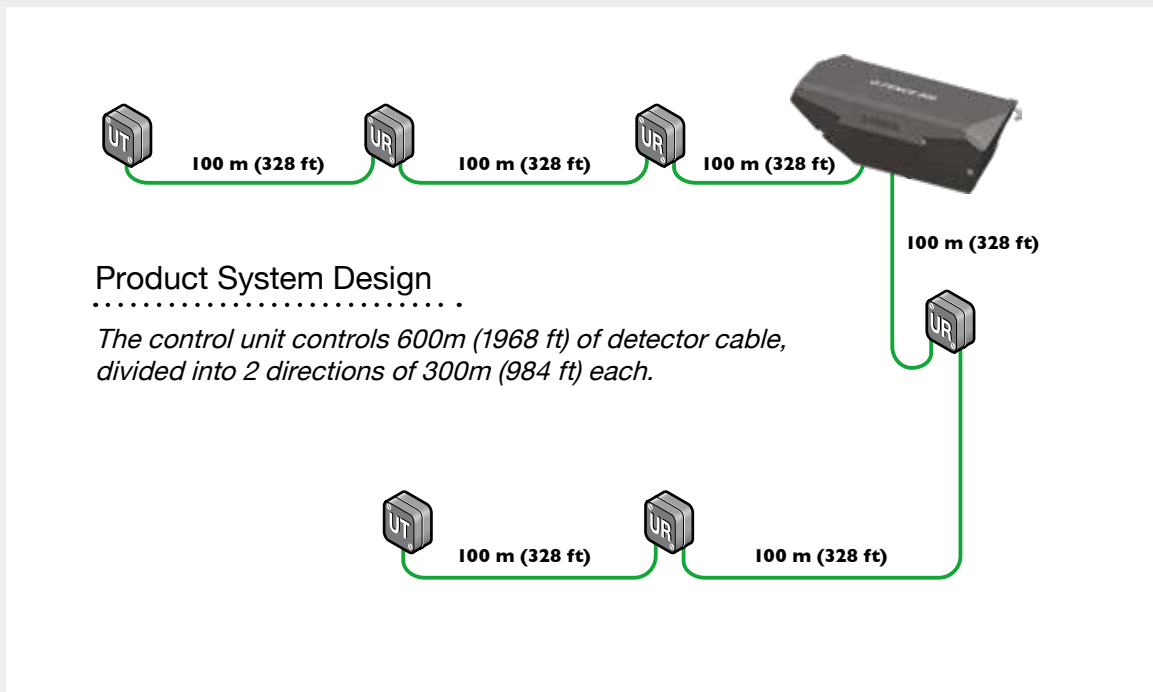


## System

<b>Ref. 40670201</b>	Control Unit G-FENCE 600 - 3 alarm outputs - Inside / Outside installation
<b>Réf. 40670205</b>	Control Unit G-FENCE 600 Z - 11 alarm outputs - Inside / Outside installation
<b>Ref. 40670202</b>	100m roll of detector Cable including 40 sensors - Green colour (RAL 6500)
<b>Ref. 40670204</b>	Termination / Link Unit - UR/UT G-FENCE 600
<b>Ref. 81100081</b>	Outdoor Power Supply/Charger 110/230Vac 50/60Hz / 13.6Vdc - 2.2A - IP56 watertight plastic housing
<b>Ref. 35145000</b>	Battery 12V 1.2Ah for power supply 81100081
<b>Ref. 93375007</b>	Tie wraps - 26A1010 (bag of 1000) - 1 bag for 500m (1640 ft) of cable



### Stamp of the retailer



In order to continuously ensure the high standard of quality and performance of our products, we reserve the right to modify the present technical data without notification.